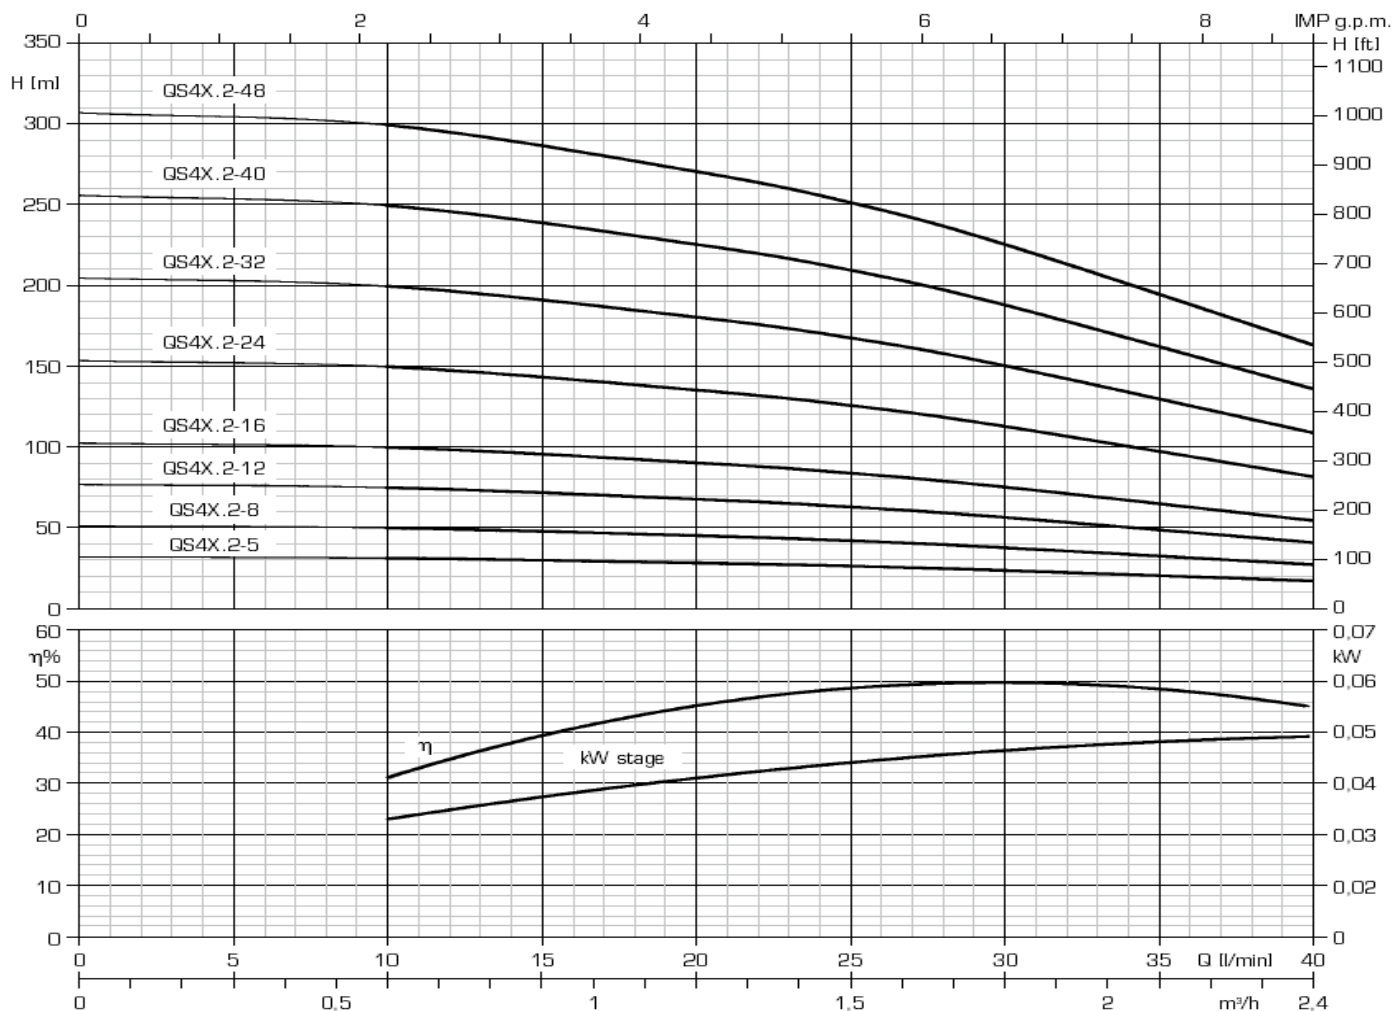


QS4P.2 ; QS4X.2

Electropompă submersibilă de 4", Varianta "P+X"

ZDS

Pump innovation

AVB POMPEwww.avbpompe.com
avbpompe@yahoo.com

Electropompă QS4P.2 Electropompă QS4X.2 cu 2 metri cablu	CARACTERISTICI HIDRAULICE (n=2850rpm)							Lungime (mm)	Greutate (kg)
	Debit (Q) – Diametru refulare: 1" ¼ G-F								
	mc/h	0	0,6	1,2	1,5	1,8	2,4		
	l/min	0	10	20	25	30	40		
QS4P.2-5 / 0,25kW/220V QS4X.2-5 / 0,25kW/220V	Presiune (mca)	32	31	28	26	23	17	699	10,6
QS4P.2-8 / 0,37kW/220V QS4X.2-8 / 0,37kW/220V		51	49	45	41	37	27	766	11,1
QS4P.2-12 / 0,55kW/220V QS4X.2-12 / 0,55kW/220V		76	74	67	62	56	40	871	12,4
QS4P.2-16 / 0,75kW/220V QS4X.2-16 / 0,75kW/220V		102	99	90	83	75	54	986	14,1
QS4P.2-24 / 1,1kW/220V QS4X.2-24 / 1,1kW/220V		153	149	135	125	112	81	1201	17,1
QS4X.2-32 / 1,5kW/220V QS4X.2-32 / 1,5kW/380V		205	200	180	168	150	108	1374	21,4
QS4X.2-40 / 2,2kW/220V QS4X.2-40 / 2,2kW/380V		256	250	225	210	188	136	1587	22,3
QS4X.2-48 / 2,2kW/220V QS4X.2-48 / 2,2kW/380V		307	300	271	251	225	163	1767	23,7

QS4P.2 ; QS4X.2

Electropompă submersibilă de 4", Varianta "P+X"

ZDS

Pump innovation

AVB POMPEwww.avbpompe.com
avbpompe@yahoo.com