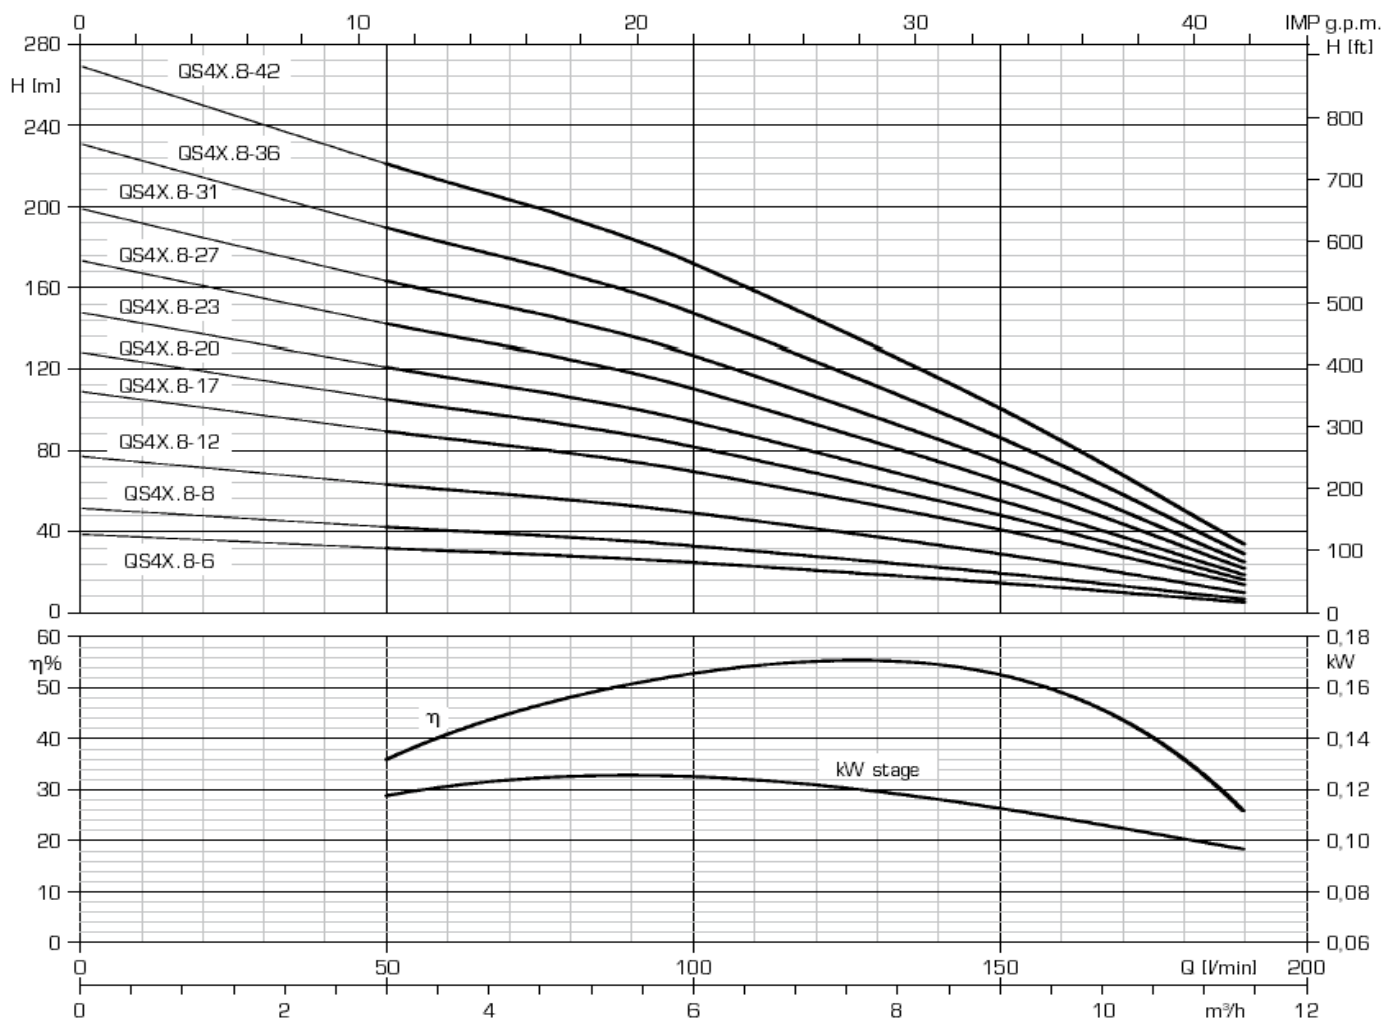


QS4X.8

Electropompă submersibilă de 4", Varianta "X"

ZDS

Pump innovation

AVB POMPEwww.avbpompe.com
avbpompe@yahoo.com

Electropompă QS4X.8 cu 2 metri cablu	CARACTERISTICI HIDRAULICE (n=2850rpm)								Lungime (mm)	Greutate (kg)
	Debit (Q) – Diametru refulare: 2" G-F									
	mc/h	0	4,2	4,8	6	8	9	11,4		
	l/min	0	70	80	100	133	150	190		
QS4X.8-6 / 0,75kW/220V QS4X.8-6 / 0,75kW/380V	Presiune (mca)	38	29	28	24	18	14	5	941	14,5
QS4X.8-8 / 1,1kW/220V QS4X.8-8 / 1,1kW/380V		51	38	37	33	24	19	6	1081	16,7
QS4X.8-12 / 1,5kW/220V QS4X.8-12 / 1,5kW/380V		77	58	55	49	36	29	10	1284	19,9
QS4X.8-17 / 2,2kW/220V QS4X.8-17 / 2,2kW/380V		109	82	78	69	51	41	14	1579	21,6
QS4X.8-20 / 3kW/380V		128	96	92	82	60	48	16	1737	23,4
QS4X.8-23 / 3kW/380V		147	111	106	94	70	55	18	1894	24,3
QS4X.8-27 / 4kW/380V		173	130	124	110	80	65	22	2187	28,3
QS4X.8-31 / 4kW/380V		198	150	143	127	92	74	25	2397	29,5
QS4X.8-36 / 5,5kW/380V		230	174	166	147	107	86	29	2757	34,9
QS4X.8-42 / 5,5kW/380V		269	203	194	171	124	101	34	3072	36,8

QS4X.8

Electropompă submersibilă de 4", Varianta "X"

ZDS

Pump innovation

AVB POMPEwww.avbpompe.com
avbpompe@yahoo.com