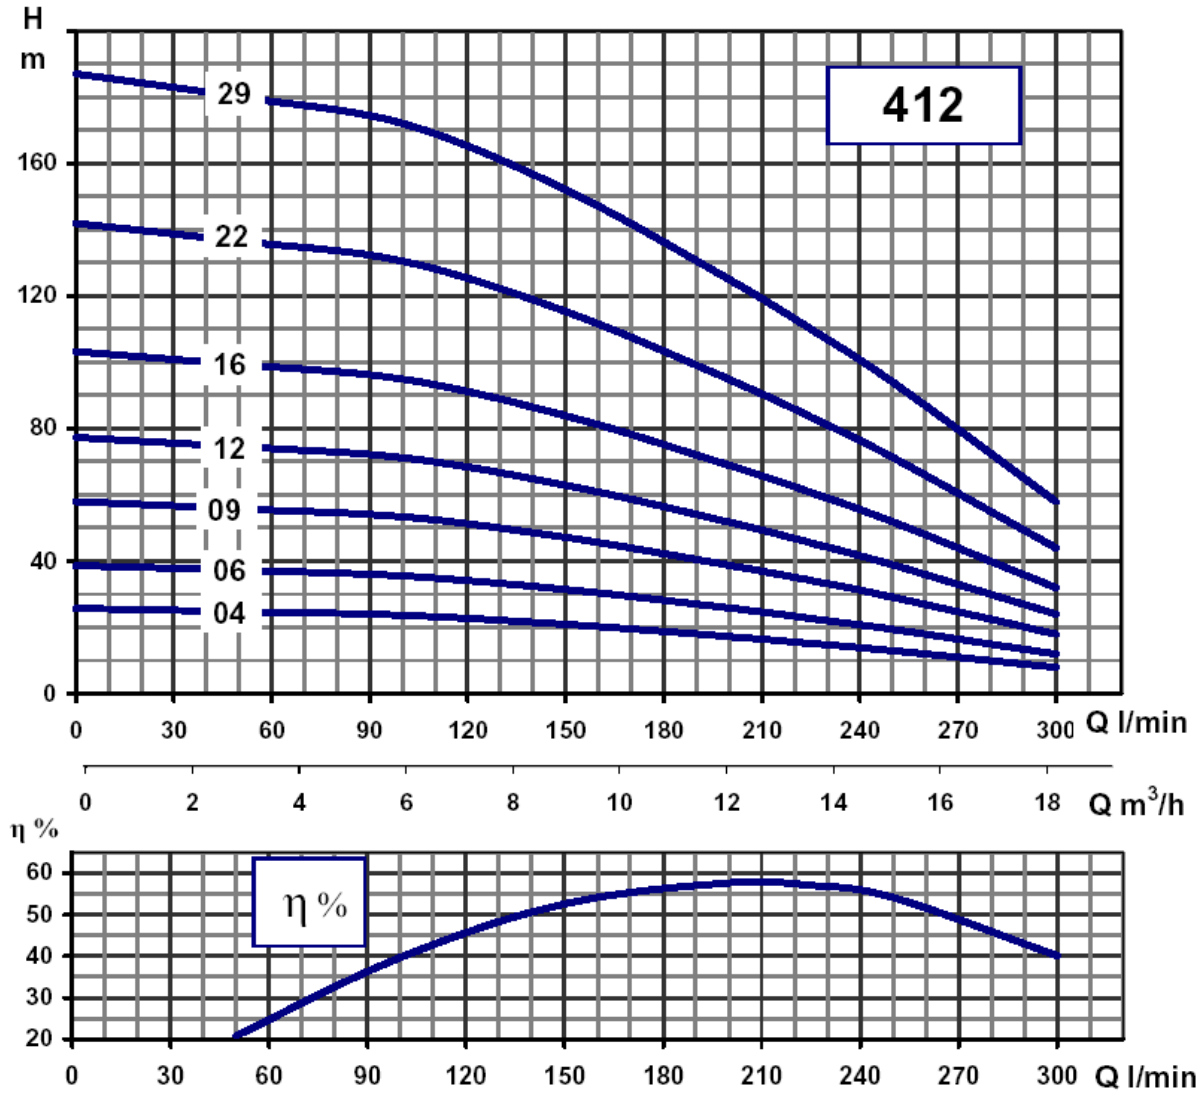


**BJ.412**

Electropompă submersibilă de 4"

**Franklin  
Motors****AVB POMPE**www.avbpompe.com  
avbpompe@yahoo.com

Electropompă BJ.412 cu 2 metri cablu	CARACTERISTICI HIDRAULICE (n=2850rpm)								A	G	
	Debit (Q) – Diametru refulare: 2" G-F										
	mc/h	0	3	6	9	12	13,5	15	18	(mm)	(kg)
	l/min	0	50	100	150	200	225	250	300		
<b>BJ.412.04F / 1,1kW/220V</b> <b>BJ.412.04F / 1,1kW/380V</b>	Presiune (mca)	26	25	24	21	17	15	13	8	773	13,9
<b>BJ.412.06F / 1,5kW/220V</b> <b>BJ.412.06F / 1,5kW/380V</b>		39	37	36	31	26	23	19	12	906	15,7
<b>BJ.412.09F / 2,2kW/220V</b> <b>BJ.412.09F / 2,2kW/380V</b>		58	56	53	47	39	34	29	18	1207	18,7
<b>BJ.412.12F / 3kW/380V</b>		77	74	71	63	52	46	39	24	1367	22,4
<b>BJ.412.16F / 4kW/380V</b>		103	99	95	84	69	61	52	32	1776	29,4
<b>BJ.412.22F / 5,5kW/380V</b>		142	137	130	115	95	83	71	44	2244	39
<b>BJ.412.29F / 7,5kW/380V</b>		187	180	172	152	125	110	94	58	2725	46,1

**BJ.412**

Electropompă submersibilă de 4"

**Franklin  
Motors****AVB POMPE**www.avbpompe.com  
avbpompe@yahoo.com