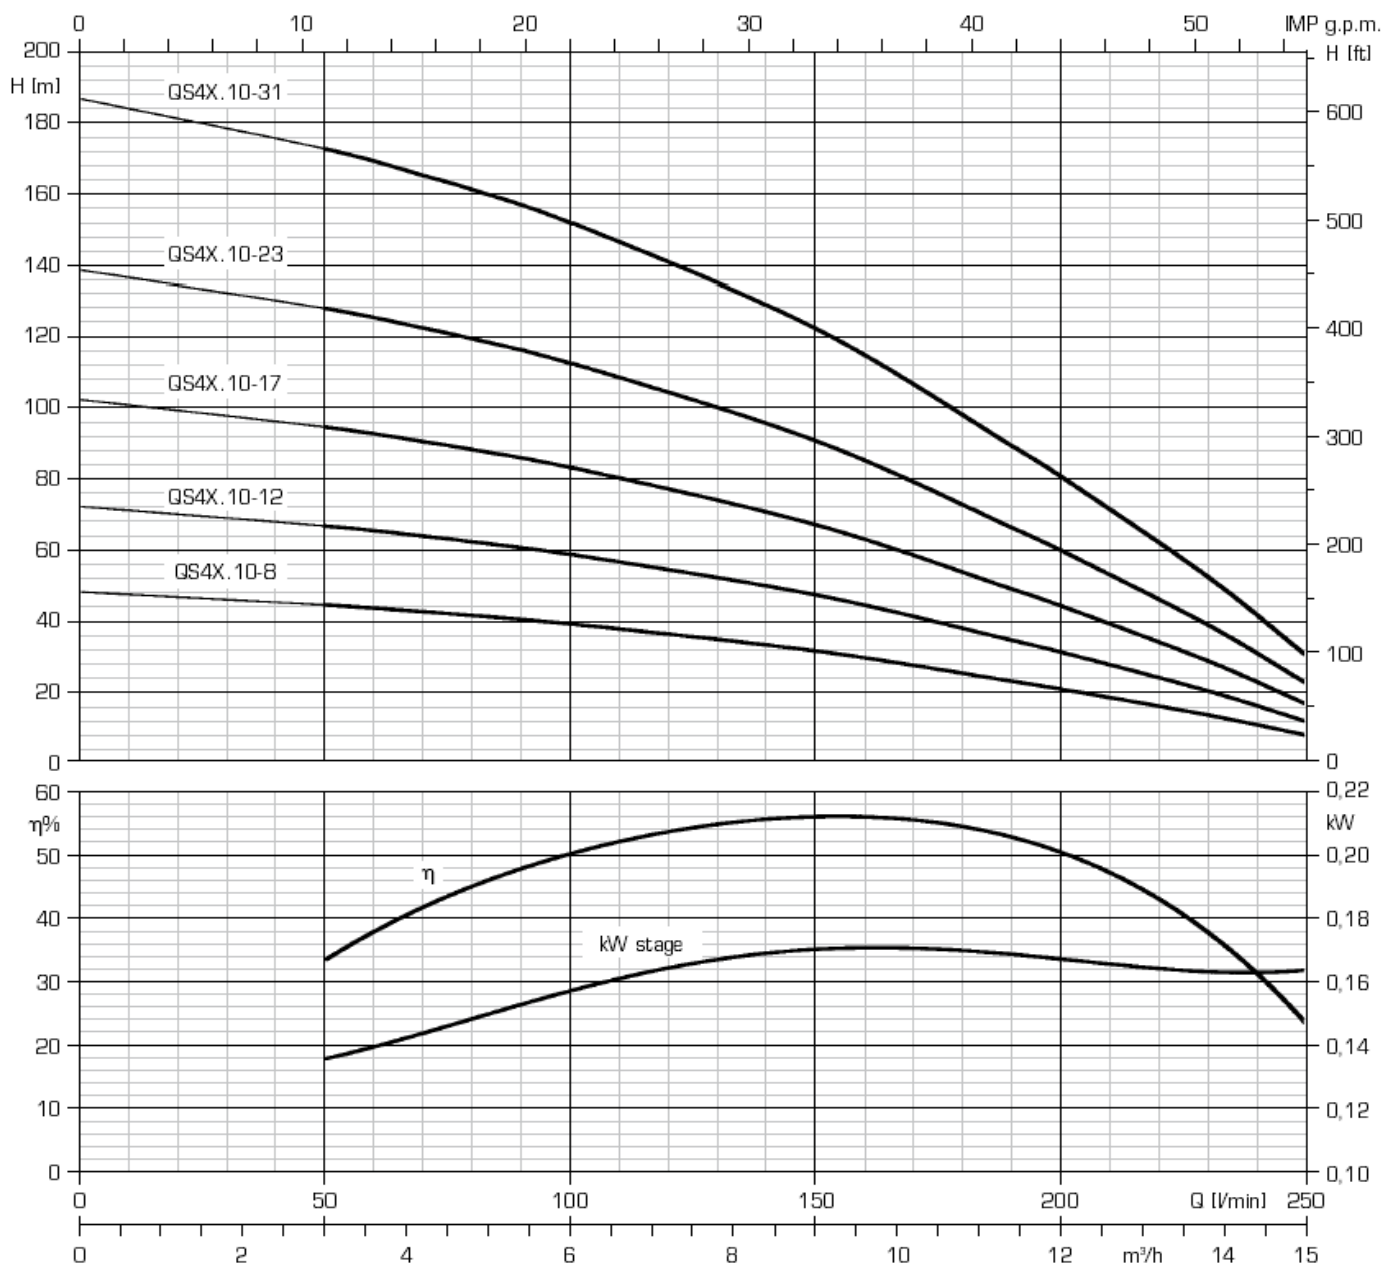


**QS4X.10**

Electropompă submersibilă de 4", Varianta "X"

**ZDS**

Pump innovation

**AVB POMPE**
[www.avbpompe.com](http://www.avbpompe.com)  
[avbpompe@yahoo.com](mailto:avbpompe@yahoo.com)


Electropompă QS4X.10 cu 2 metri cablu	CARACTERISTICI HIDRAULICE (n=2850rpm)									Lungime	Greutate
	Debit (Q) – Diametru refulare: 2" G-F										
	mc/h	0	4,2	4,8	6	9	11,4	13,8	15		
	l/min	0	70	80	100	150	190	230	250		
QS4X.10-8 / 1,5kW/220V QS4X.10-8 / 1,5kW/380V	Presiune (mca)	48	42	41	39	31	23	13	8	1074	18,5
QS4X.10-12 / 2,2kW/220V QS4X.10-12 / 2,2kW/380V		72	64	62	59	47	35	20	12	1284	20
QS4X.10-17 / 3kW/380V		102	90	88	83	67	49	29	17	1579	22,3
QS4X.10-23 / 4kW/380V		138	122	119	113	91	66	39	23	1944	26,7
QS4X.10-31 / 5kW/380V		187	165	161	152	122	89	53	31	2462	33,2

**QS4X.10**

Electropompă submersibilă de 4", Varianta "X"

**ZDS**

Pump innovation

**AVB POMPE**
[www.avbpompe.com](http://www.avbpompe.com)  
[avbpompe@yahoo.com](mailto:avbpompe@yahoo.com)